



## MPO/MTP Patchcord


<b>Features:</b>
<b>Low Insertion Loss</b> <b>High Repeatability</b> <b>Comply with RoHS/Reach,UL94-V0</b>
<b>Application:</b>
Telecom Network CATV Network SDH Network

### Specifications:

Parameter	Value
Connector Type	MPO
Fiber Type	SM 9/125 G652D   50/125 ( OM3, OM4)
Insertion loss (dB)	MPO/MTP ≤0.7 (Standard) ;≤0.5 (Low Loss) LC,FC IL<0.3dB
Return loss (dB)	≥40 (UPC) , ≥60 (APC) ≥20 (MM)
Durability	≤0.2 (dB)
Operating temperature (°C)	-40 ~ + 85
Cable type	Round or Ribbon Fiber
Length	1m, 2m, 3m, 10m, customize

Housing color—Blue(SM/UPC),Green(SM/APC),Beige(MM),Aqua

### Polarity

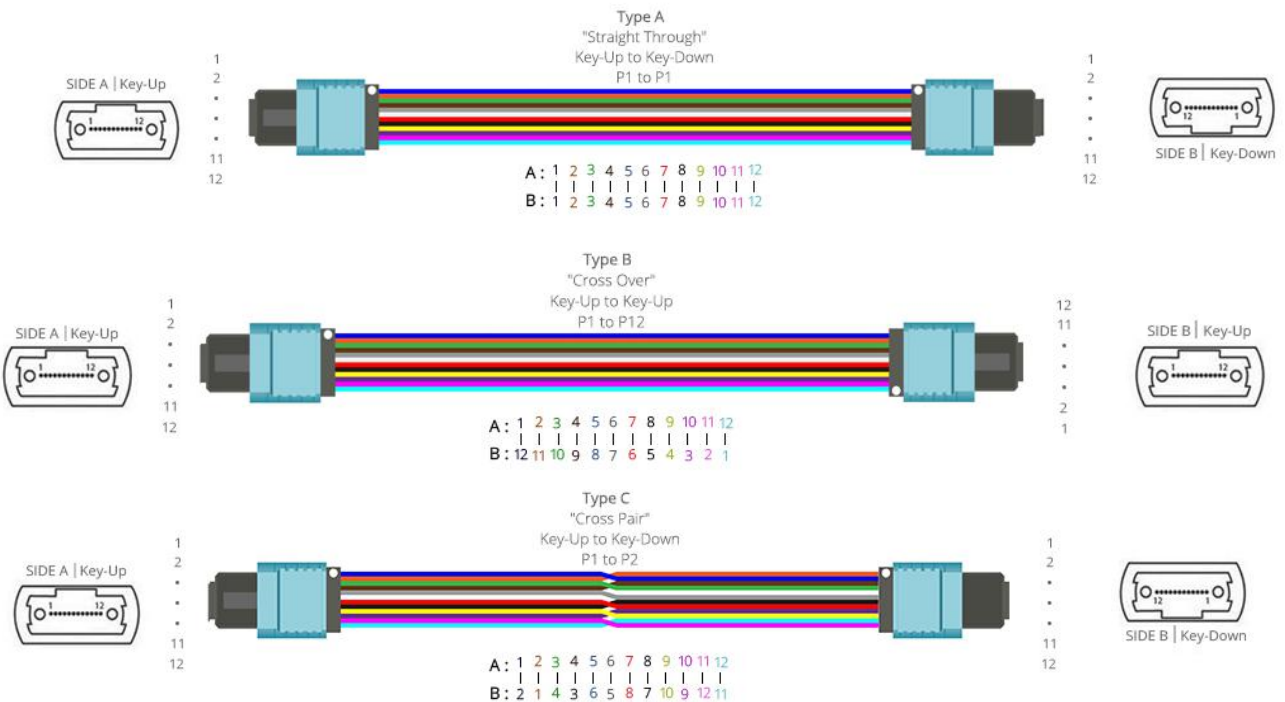



### Ordering Information

MP O	Connector (End1)	Connector (End2)	Tested Wavelength	0 0	Method	Cable Pigtail Type	Fiber Type	Length	Ferrule
	08= 8 Line	08= 8 Line	1=1310/155 0		S=Strigh t Through	R=Roun d	1=G652 D SMF-28e	1=1m	S=Standard
	12=12 line	12=12 Line	2=850		C=Cross over	B=Ribbo n Fiber	3=50/12 5 OM3	X=Spe cify	L=Low Loss
	24=24 Line	24= 24 Line			P=Cross Pair		4=50/12 5 OM4		
		LC=LC/UPC							
		LA=LC/APC							
		SC=SC/UPC							
		FC=FC/UPC							