


Multimode Tap PD Monitor

Specification

Parameter	Value	
Operating wavelength(nm)	850	
Bandwidth(nm)	±40	
Tap Ratio(%)	1%	5%
Min Responsibility(mA/W)	8	35
Insertion Loss(dB)	≤0.5	≤0.8
Dark Current (nA)	≤2.0 (@25°C, 5V bias)	
Return loss(dB)	≥30	
Bandwidth (Mhz)	10	
Fiber Type	50/125 OM3	
Operating temperature (°C)	0 ~ +70	
Storage temperature(°C)	-40 ~ +85	
Power Handling (mW)	≤300	
Dimensions(mm)	Φ5.5× L25	

Package Dimensions

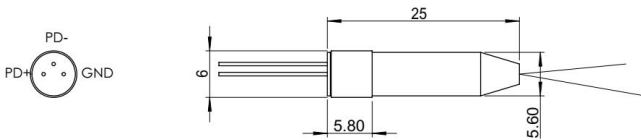

Ordering Information

TPM	Wavelength h	Coupling	Pigtail	Fiber	length	Connector	Package
	0850=850	1=1/99 5=5/95 S=Specify	0=250um bare fiber 1=900um loose tube	1=50/125 OM3 2=62.5/125	8=0.8 m S=Specify	0=None 3=SC/APC 4=SC/UPC 6=LC/UPC 7=LC/APC X=Specify	5=5.5x23