

High Power Polarization Insensitive Isolator(20w)

Features:

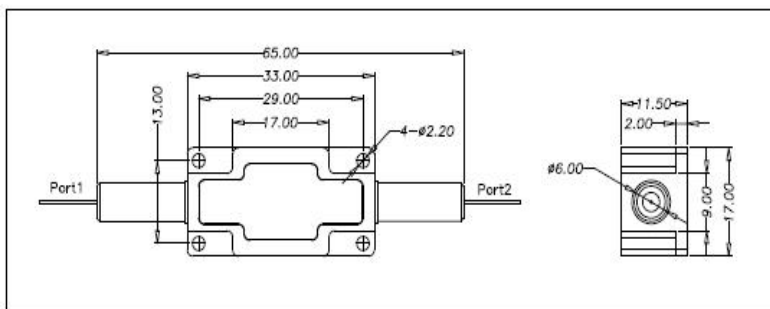
Low Insertion Loss & PDL
 High Isolation & Return Loss
 High reliability

Application:

Fiber Laser & Amplifier

Specifications:

Parameter	Value
Center wavelength (nm)	1550
Bandwidth (nm)	±15
Isolation at 23(°C) (dB)	≥25
Insertion Loss at 23(°C) (dB)	≤0.7
PDL (dB)	≤0.10
Return Loss (Input/output) (dB)	≥50/50
Fiber Type	SMF-28e
Power Handling (CW, W)	20
Operating Temperature (°C)	-5 ~ +70
Storage Temperature(°C)	-40 ~ +85
Package Dimensions (mm)	65x17x11.5

Package Dimensions

Ordering Information:

HPIIS	Wavelength	Power	00	Pigtail Type	Length	Connector
HPIIS= Insensitive	1550=1550nm	B=20W S=Specify		2=900um loose tube	H=0.5m 8=0.8m 1=1.0m S=Specify	0=None 1=FC/UPC 2=FC/APC S=Specify