

## 530nm PM Isolator

**Features:**

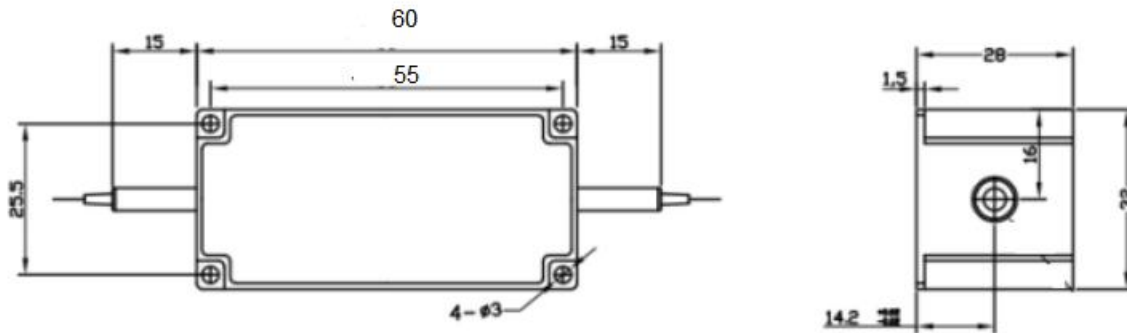
Low Insertion Loss    High Isolation    & Return Loss  
 High reliability

**Application:**

Fiber Laser

**Specifications:**

Parameter	Value
Center wavelength (nm)	530
Bandwidth (nm)	±10
Insertion Loss @23°C	≤1.8
Isolation at 23°C(dB)	≥20
PER(dB)	≥18
Return loss (Input/output) (dB)	≥50/50
Optical power (W)	0.3-1
Fiber Type	PM460
Operating temperature (°C)	0 ~ +65
Storage temperature (°C)	-20 ~ +85
Package Dimension LxWxH (mm)	60x32x28

**Package dimension:**

**Ordering Information:**

HPMIS	Wavelength	Power	00	Pigtail Type	Length	Connector
	530=530	03=300mW 01=1W		2=900um loose tube	H=0.5m 7=0.7m 1=1.0m S=Specify	0=None 1=FC/UPC 2=FC/APC 6=Specify