

## 980nm PM Isolator

### Features:

Low Insertion Loss    High Isolation    & Return Loss  
High reliability


### Application:

Fiber Laser

### Specifications:

Parameter	Value
Center wavelength (nm)	980
Bandwidth (nm)	±10
Insertion Loss @23°C	≤1.0
Isolation at 23°C(dB)	≥25
PER(dB)	≥20
Return loss (Input/output) (dB)	≥50/50
Optical power (W)	0.3-5
Fiber Type	PM980
Operating temperature (°C)	0 ~ +65
Storage temperature (°C)	-20 ~ +85
Package Dimension LxWxH (mm)	68x32x28

### Package dimension:

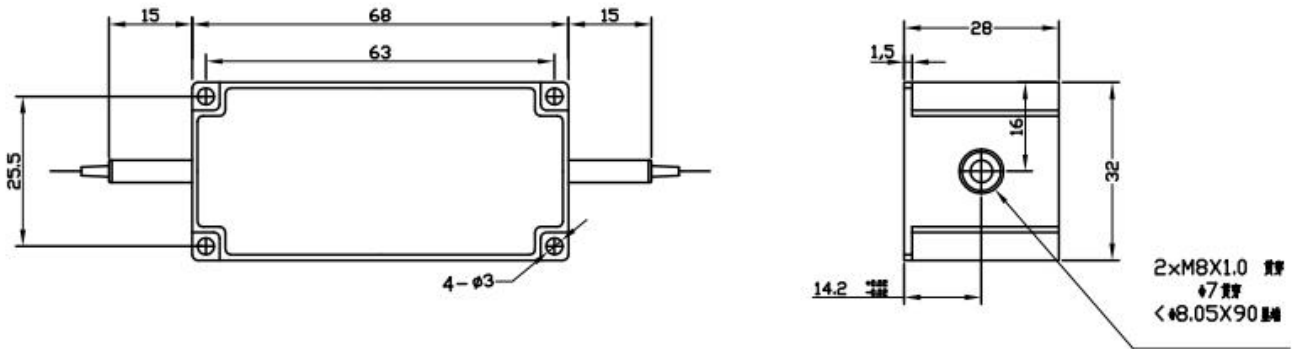

### Ordering Information:

HPIIS	Wavelength	Power	00	Pigtail Type	Length	Connector
HPIIS	980=980	03=300mW 01=1W 05=5W		2=900um loose tube	H=0.5m 7=0.7m 1=1.0m S=Specify	0=None 1=FC/UPC 2=FC/APC 6=Specify