

Multi Mode Pump Laser Protector

Features:

Low Insertion Loss & High Isolation
High Return Loss & Power Handling

Application:

Fiber Amplifier
Fiber Laser
Fiber Instrument

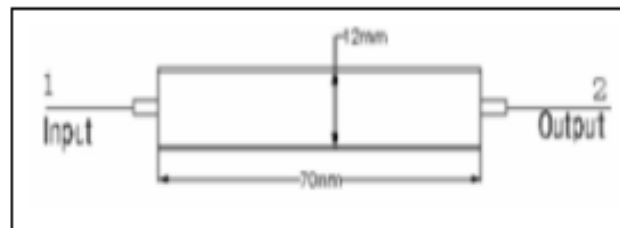
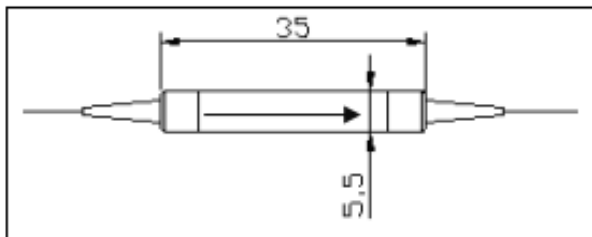
Specifications:

Parameter	Values
Pass wavelength (nm)	900~1000
Reflection Wavelength (nm)	1020~1120 or 1500~1600
Pass insertion Loss (dB)	≤0.6
Isolation (dB)	≥25
Return Loss (dB)	≥30
TDL (dB)	≤0.20
Power Handling (W)	1,2,3,5,10,20
Tensile Load (N)	≤5
Fiber Type	Multimode Fiber 50/125, 62.5/125, 105/125 N.A.0.22
Operating Temperature (°C)	0 ~ +70
Storage Temperature(°C)	-40 ~ +85
Dimensions (mm)	Φ5.5*35 (P1) or 70×12×9(P2)

*Above specifications are for devices without connector.

*For devices with connectors, IL will be 0.5 dB higher and RL will be 10 dB lower .

*Above specifications are measured in low order modes.

Package Dimensions:

Ordering Information:

MMPLP	Pass/Reflect Wavelength	Package	Power	Fiber Core	Pigtail Type	Length	Connector
	9806=980Pass/ 1064Reflect 9855=980Pass/ 1550Reflect	1=P1(5.5*35mm) 2=P2(70*12*9mm)	1=1W 2=2W 3=3W 4=4W 5=5W A=10W B=20W S=Specify	1=50um 2=62.5um 3=105um	1=250um bare fiber 2=900um loose tube 3=3mm loose tube 4=2mm loose tube	H=0.5m 8=0.8m 1=1.0m 5=1.5m 2=2.0m 3=3.0m 4=4.0m A=2.5m S=Specify	0=None 1=FC/UPC 2=FC/APC 3=SC/APC 4=SC/UPC 5=MU 6=LC/UPC 7=LC/APC S=Specify